



**INTEGRATION
PERC60**

PERC 305-320 Wp

Schweizer

**Exquisitly designed
in-roof panel**

Inroof system, BIPV-Typ
EN 50583, Category A

Easy to install, reliable
operation

Rainproof like a tiled roof
(SIA 232/1)

Excellent mechanical load
values, compressive load
up to 5,400 Pa ²

**Optimized for
performance**

PID-free PERC high
performance solar cells

Antireflective-coated
solar glass

Low-light optimized

Positively classified
-0/+4.99 Wp

Industry-leading
NMOT values

**Highest quality
standards**

Manufactured
according to
DIN EN ISO 9001:2015
DIN EN ISO 14001:2015
BS OHSAS 18001:2007

PV-module
type approval
according to
IEC 61215:2016 ³

PV-module
safety qualification
according to
IEC 61730:2016 ³

**Guaranteed
performance ¹**

26 years of linear
performance guarantee

12 years product
guarantee, optional
extension to 25 years

Total Care for the entire
system (optional)

¹ For detailed information please consult the CS Wismar GmbH warranty conditions

² See backside for detailed test loads

³ Subject to recertification

INTEGRATION 305 | 310 | 315 | 320 PERC60

Performance STC

Under standard Test Conditions STC:
1000 W/m²; spectrum AM 1.5;
Cell temperature 25°C
Measurement tolerance STC:
P_{mpp} ±3%; I_{sc} ±10%; U_{oc} ±10%



Nominal Power P _{mpp} (Wp)	305	310	315	320
Open Circuit Voltage U _{oc} (V)	39,62	39,82	40,03	40,22
Voltage U _{mpp} (V)	32,94	33,16	33,37	33,61
Short Circuit Current I _{sc} (A)	9,87	9,98	10,09	10,20
Current I _{mpp} (A)	9,26	9,35	9,44	9,52
Efficiency η (%)	17,1	17,4	17,6	17,9

Reduction of module efficiency at reduction from 1000 W/m² to 200 W/m²: 2,6% ± 0,1% (relative)

Performance NMOT

Nominal operating temperature of module
800 W/m², NMOT, AM 1.5

Nominal Power P _{mpp} (Wp)	239	243	246	250
Open Circuit Voltage U _{oc} (V)	37,05	37,24	37,44	37,61
Voltage U _{mpp} (V)	32,29	32,50	32,71	32,94
Short Circuit Current I _{sc} (A)	7,97	8,06	8,15	8,24
Current I _{mpp} (A)	7,39	7,46	7,53	7,60

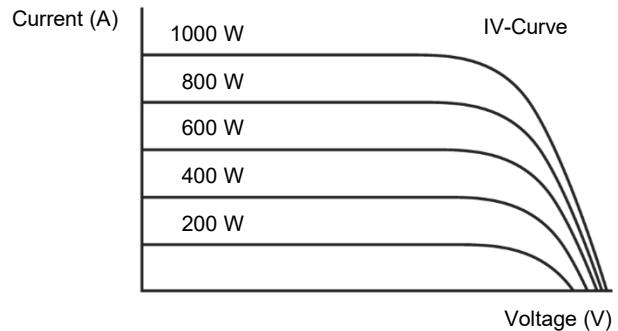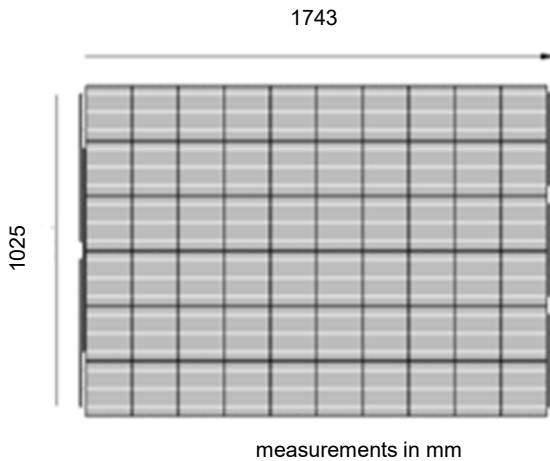

Other Technical Specification

Max. system voltage	1000 V
Weight	19.0 ± 0.5 kg
Reverse Current Load IR	15 A
Junction box	IP 67 with 3 bypass diodes
Connectors	IP 67, MC4
Fire rating	class C
Operating temperature	-40°C ... +85°C
Design load: snow	3.600 Pa *
Max test load	5.400 Pa
Design load: wind	1.600 Pa *
Max test load	2.400 Pa
Outer dimensions	1743 x 1025 mm
Raster dimensions	1725 x 993 mm

Thermal Properties

TC P _{mpp}	-0.39 %/K
TC U _{oc}	-0.28 %/K
TC I _{sc}	0.040 %/K
NMOT	45 +/- 2 °C

Material Used

No. of cells	60 cells
Type of cells	mono perc
Front	hardened solar glass
Frame	Solrif frame
Frame height	16 mm
Module height	35 mm

* safety factor 1.5

