SONNENSTROM FABRIK

EXCELLENT GLASS/GLASS M32 DIBt

MONOCRYSTALLINE 165–175 WP

CS Wismar GmbH
Allgemeine bauaufsichtliche Zulassung
Z-70.3-280
Deutsches Institut für Bautechnik

High Transparency 51%

GLAS
GLAS

Transparency and Performance

The cell matrix is optimized for light transmission and maximum performance

The optimized cell matrix enables a light transparency of 51%

Optimizes electricity production whilst preserving daylight diffusion for agricultural greenhouses and buildings

Perfect architectural integration and control of natural light contribution for verandas, pergolas, awnings and carports

30 years linear performance guarantee

20 years product guarantee

Optional Total Care for the entire system

[1] For detailed information please consult the CS Wismar GmbH warranty conditions
[2] See backside for detailed test loads
[3] Subject to recertification

EXCELLENT GLASS/GLASS 165 | 170 | 175 M32

DIBt

Performance STC

Under standard Test Conditions STC:
1000 W/m²; spectrum AM 1.5;
Cell temperature 25°C
Measurement tolerance STC:
Pmpp ±3%; Isc ±10%; Uoc ±10%

Nominal Power Pmpp (Wp)	165	170	175
Open Circuit Voltage Uoc (V)	21,16	21,39	21,59
Voltage Umpp (V)	17,72	17,99	18,25
Short Circuit Current Isc (A)	9,99	10,19	10,39
Current Impp (A)	9,31	9,45	9,59
Efficiency η (%)	9,7	10,0	10,3

Reduction of module efficiency at reduction from 1000 W/m² to 200 W/m²: 6,1% ± 0,3% (relative)

Performance NMOT

Nominal operating temperature of module
800 W/m², NMOT, AM 1.5

Nominal Power Pmpp (Wp)	125	129	133
Open Circuit Voltage Uoc (V)	19,79	20,00	20,19
Voltage Umpp (V)	16,82	17,07	17,32
Short Circuit Current Isc (A)	8,07	8,23	8,40
Current Impp (A)	7,43	7,54	7,65

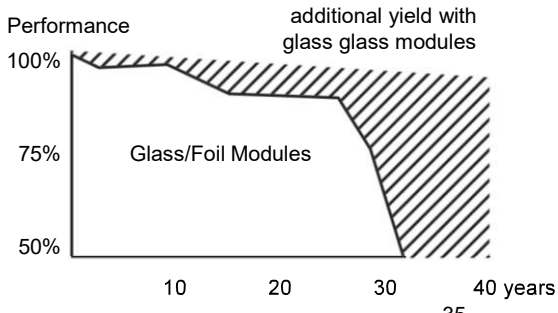

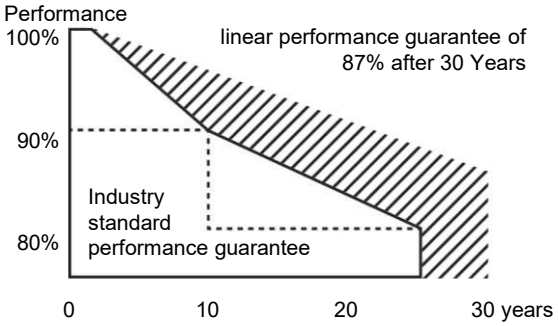

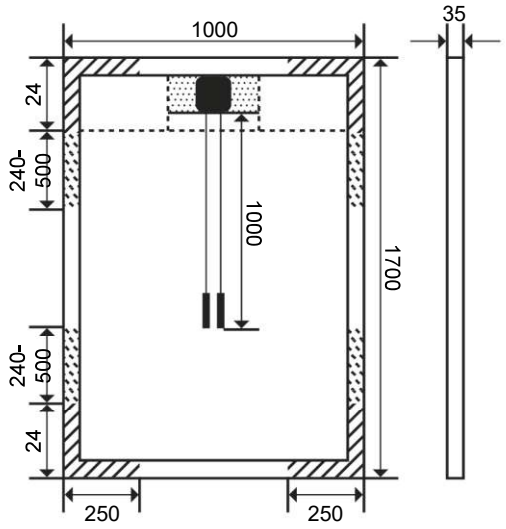

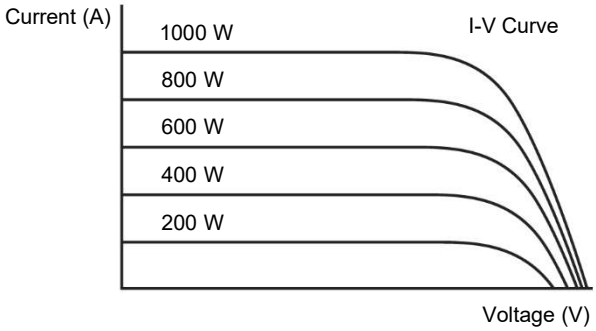

Other Technical Specification

Max. system voltage	1000 V
Weight	ca. 36.0 kg
Reverse Current Load IR	15 A
Junction box	IP 67 with 3 bypass diodes
Connectors	IP 67, MC4
Fire rating	class C
Operating temperature	-40°C …+85°C
Design load: snow	1.600 Pa *
Max test load	2.400 Pa
Design load: wind	1.600 Pa *
Max test load	2.400 Pa

* safety factor 1.5

Thermal Properties

TC Pmpp	-0.39 %/K
TC Uoc	-0.28 %/K
TC Isc	0.040 %/K
NMOT	45 +/- 2 °C

Material Used

No. of cells	32 cells
Type of cells	monocrystalline
Front & back	3 mm TVG solar glass
Frame	anodized aluminium
Frame height	35mm

With the Ü mark, we confirm that the PV module was produced in accordance with the provisions of the abZ/aBG Z-70.3-280 and thus proves the usability or applicability of the product in terms of the state building codes. This does not replace the permits, approvals and certificates required by law for the implementation of construction projects.

Deutsches Institut für Bautechnik DIBt

TÜVRheinland ZERTIFIZIERT
Management System
ISO 9001:2015
ISO 14001:2015
ISO 45001:2018
www.tuv.com
ID 9000026381