

Full Black



Optional: Junction box
1500 Volt




Optional: Heavy snow
load frame



Optional: 30 yrs
guarantee



Optional: Total-
Care Insurance

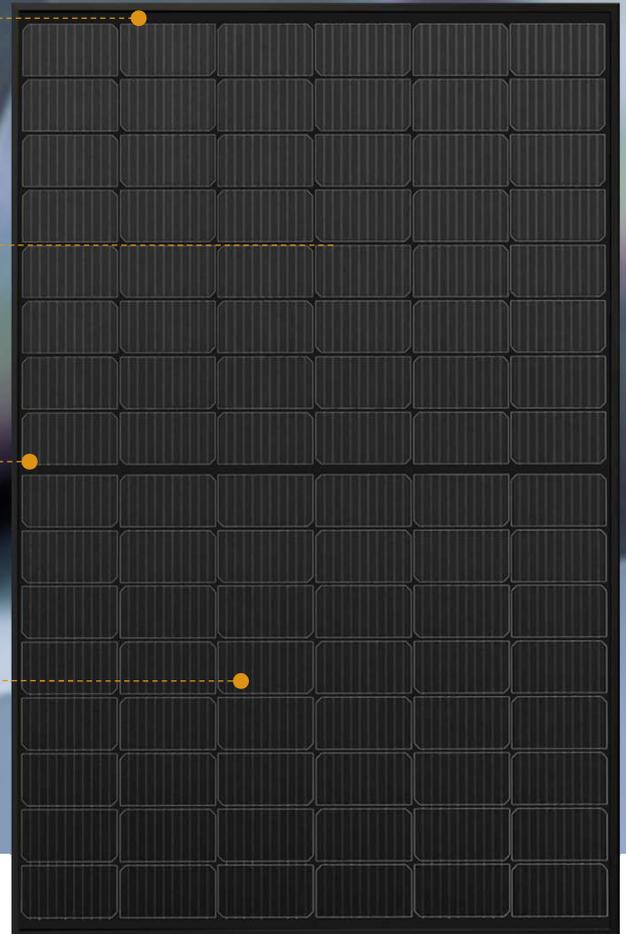

DIAMOND N M96

375 WP

MONOCRYSTALLINE



Long lifetime even under extreme conditions

2 x 2 mm strong, hardened and scratch resistant solar glass

Protection of cells against microcracks through double glass composite

Maximum test load 8.100 Pa. ²

Original MC4 plugs and fire resistant cables

Stability optimized for increased requirements due to slipping snow loads (optional)

Extended hail impact tests to 30 mm

Optimized for performance

PID-free monocrystalline high performance solar cells

Antireflective coated solar glass

Low-light optimized

Positively classified -0/+4.99 Wp

Industry-leading NMOT values

Highest quality standards

Manufactured according to
DIN EN ISO 9001:2015
DIN EN ISO 14001:2015
DIN EN ISO 45001:2018

PV-module type approval according to IEC 61215:2016 ³

PV-module safety qualification according to IEC 61730:2016 ³

Resistant to ammonia according to IEC 62716:2013

Guaranteed performance ¹

30 years of linear performance guarantee

20 years product guarantee, optional extension to 30 years

Total Care for the entire system (optional)

¹ For detailed information please consult the CS Wismar GmbH warranty conditions

² See backside for detailed test loads

³ Subject to recertification




DIAMOND N 375 M96 balance | full black

Performance STC


Under standard Test Conditions STC:
 1000 W/m²; spectrum AM 1.5;
 Cell temperature 25°C
 Measurement tolerance STC:
 P_{mpp} ±3%; I_{sc} ±10%; U_{oc} ±10%

Nominal Power P _{mpp} (Wp)	375
Open Circuit Voltage U _{oc} (V)	33,00
Voltage U _{mpp} (V)	28,91
Short Circuit Current I _{sc} (A)	13,78
Current I _{mpp} (A)	12,98
Efficiency η (%)	21,06

Reduction of module efficiency at reduction from 1000 W/m² to 200 W/m²: 3,3% ± 0,5% (relative)

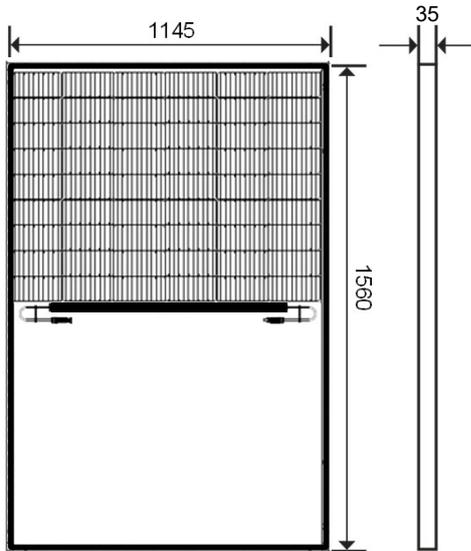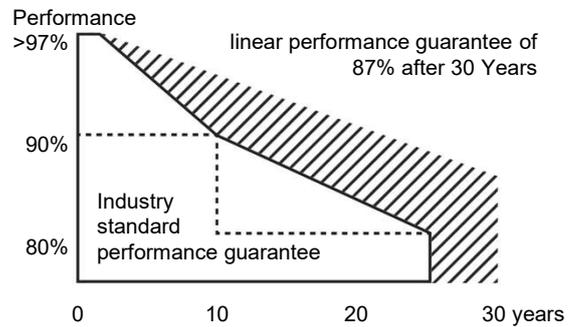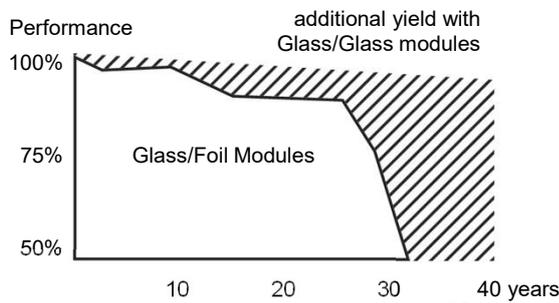

measurements in mm

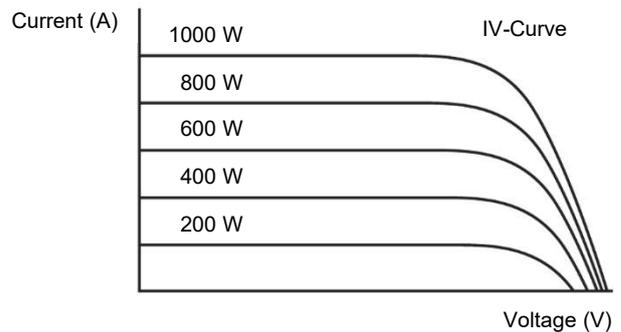

Other Technical Specification

Max. system voltage	1000 V
Weight	23.0 ± 0.5 kg
Reverse current load I _R	25 A
Junction Box	IP68
Connector	IP65/ IP68, MC4
Fire Class Rating	Class C
Operating temperature	-40°C ... +85°C
design load: snow	5.400 Pa
maximum test load	8.100 Pa
design load: wind	2.400 Pa
maximum test load	3.600 Pa

* safety factor 1.5

Thermal Properties

TC P _{mpp}	-0.39 %/K
TC U _{oc}	-0.28 %/K
TC I _{sc}	0.040 %/K
NMOT	45 +/- 2 °C



Material Used

Number of cells	96 half-cut CELLS
Cell type	mono perc
Front cover	hardened solar glass
Frame material	anodized aluminium
Frame height	35 mm

Applied Standards

ISO 9001:2015	IEC 61215:2016
ISO 14001:2015	IEC 61730:2016
ISO 45001:2018	IEC 61701:2020